


# 1 Function Standard Transmitter

## REPLACEMENT TRANSMITTER

92101TX 1 Function Standard Transmitter

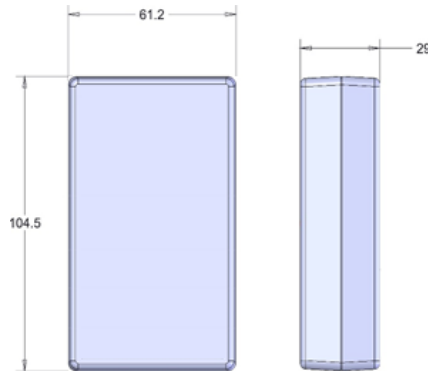

## CONTENTS

1 x Standard Transmitter  
1 x Lanyard  
1 x Cover  
1 x Instructions

## TRANSMITTER SPECIFICATION

### ENCLOSURE

Material Glass reinforced Nylon  
Switch Type 12mm Dome Switch  
Functions 1  
Identification Pockets for printed text or image insertion

### RF

Modulation 2-GFSK. Gaussian Frequency Shift Keying  
Frequency 433.050 MHz to 434.790 MHz  
Channels 1  
Channel Selection Fixed  
Technology Hand-held Transmitter  
Temperature Range -10° C to + 40° C (13° F to + 104° F). Use Lithium for lower temperatures  
Range 60m (200ft)  
Aerial Internal – printed on PCB  
Transmitted power 1mW Typical

### POWER

Batteries 1x 9V Alkaline Manganese  
Quiescent Current 15µA  
Current Transmitting 20mA

### PROTECTION

IP Rating 54  
Registration codes Over 16 million

### INDICATOR

Type 1 x Red LED  
Off Transmitter is OFF and in standby mode  
Slow flash Transmitter is ON and ready for use (The SET Button has been pressed and released)  
On Transmitting (A STOP, SET or Function Button is being pressed)  
Fast flash Transmitting – Indication that the battery will need replacing soon

### COMPLIANCE

FCC FCC CFR 47-part 15.231  
433.9MHz

IC ISED RSS-210 Issue 8  
433.9MHz

RoHS Directive 2011/65/EU