



# RQ\*-W

## PRESSURE RELIEF VALVE


### SERIES 41

#### THREADED PORTS

**p** max 350 bar

**Q** max (see table of performances)


#### OPERATING PRINCIPLE

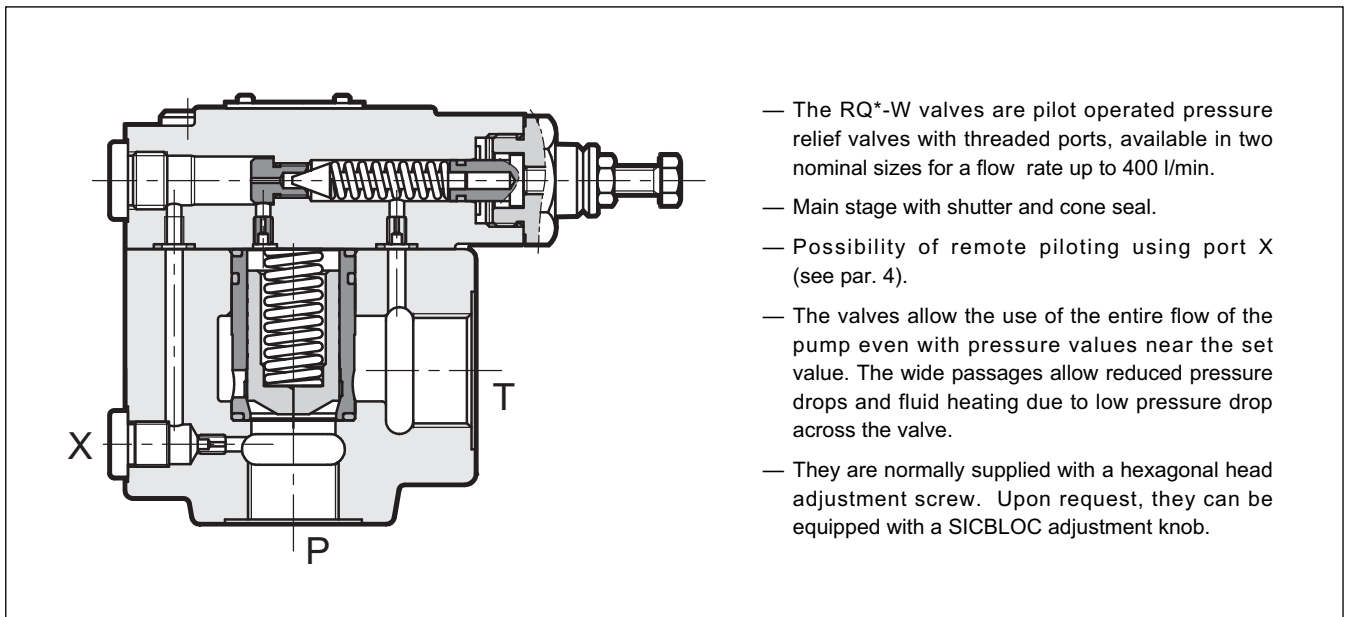

#### PERFORMANCES (measured with mineral oil of viscosity 36 cSt at 50°C)


		RQ5-W	RQ7-W
Maximum operating pressure	bar	350	
Maximum flow rate	l/min	250	400
Ambient temperature range	°C	-20 / +50	
Fluid temperature range	°C	-20 / +80	
Fluid viscosity range	cSt	10 ÷ 400	
Fluid contamination degree	According to ISO 4406:1999 class 20/18/15		
Recommended viscosity	cSt	25	
Mass	kg	4,1	8

#### HYDRAULIC SYMBOL

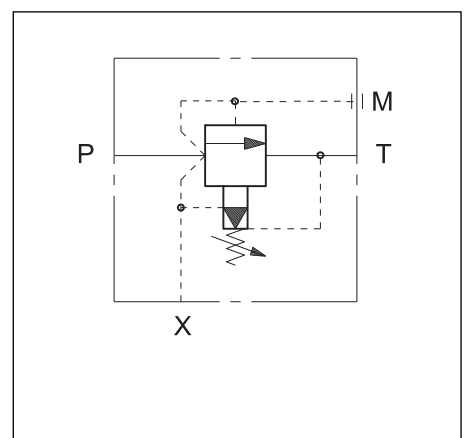




### 1 - IDENTIFICATION CODE

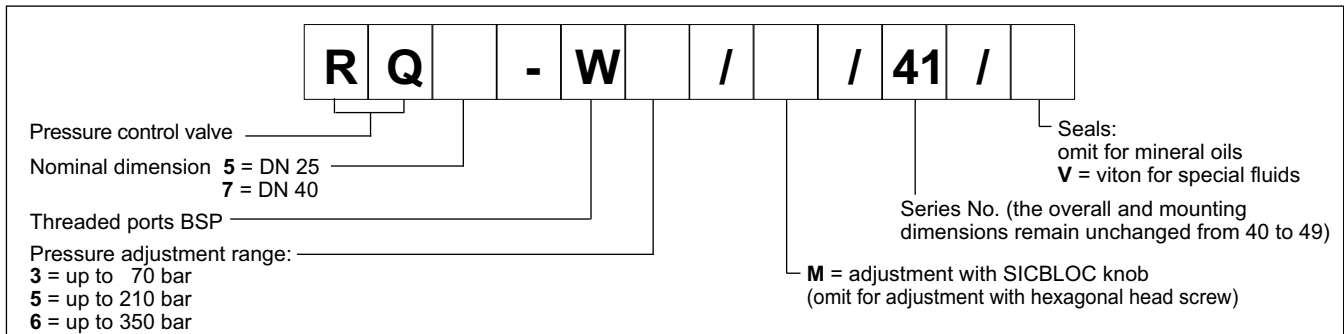

### 2 - CHARACTERISTIC CURVES (values obtained with viscosity of 36 cSt at 50°C)

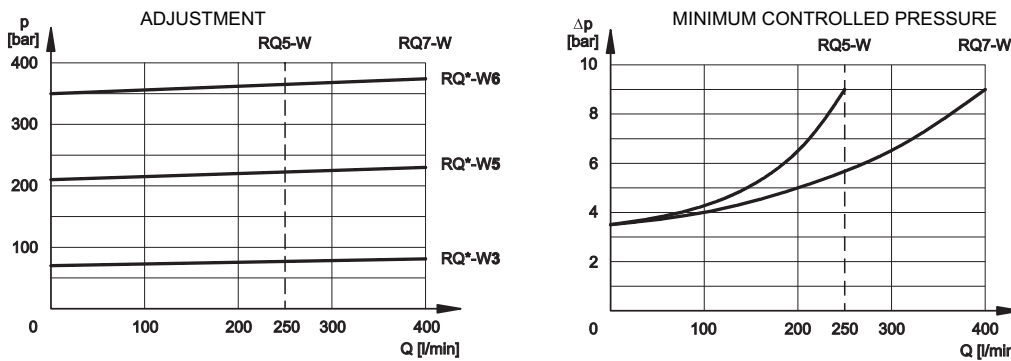

### 3 - HYDRAULIC FLUIDS

Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals. For fluids HFDR type (phosphate esters) use FPM seals (code V). For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department. Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics. The fluid must be preserved in its physical and chemical characteristics.

### 4 - OVERALL AND MOUNTING DIMENSIONS

dimensions in mm

1	Hexagonal head adjustment screw. Spanner 13. Clockwise rotation to increase pressure
2	Remote piloting port X 1/4 BSP
3	Outlet port T <b>RQ5-W:</b> 1" BSP <b>RQ7-W:</b> 1" 1/2 BSP
4	Pressure port P <b>RQ5-W:</b> 3/4" BSP <b>RQ7-W:</b> 1" 1/4 BSP
5	Pressure gauge port 3/8 NPT
6	SICBLOC adjustment knob. To operate, push and rotate at the same time.

	A	B	C	D	ØE	F	G	H	I	L	M	ØN	ØO
<b>RQ5-W</b>	168	98	49	4	22	21.5	44.5	123	80	87	53	35.5	46
<b>RQ7-W</b>	168	98	49	4	22	43	59.5	145	102	109	68	50	56



**DIPLOMATiC OLEODINAMiCA S.p.A.**  
 20015 PARABIAGO (MI) • Via M. Re Depaolini 24  
 Tel. +39 0331.895.111  
 Fax +39 0331.895.339  
 www.diplomatic.com • e-mail: sales.exp@diplomatic.com