
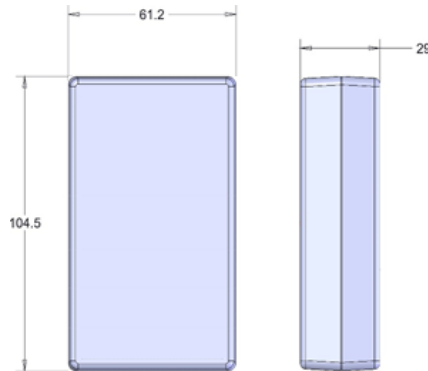


# 2 Function Standard Transmitter

## REPLACEMENT TRANSMITTER

92102TX 2 Function Standard Transmitter



### CONTENTS

- 1 x Standard Transmitter
- 1 x Lanyard
- 1 x Cover
- 1 x Instructions

## TRANSMITTER SPECIFICATION

### ENCLOSURE

Material	Glass reinforced Nylon
Switch Type	12mm Dome Switch
Functions	2
Identification	Pockets for printed text or image insertion

### RF

Modulation	2-GFSK. Gaussian Frequency Shift Keying
Frequency	433.050 MHz to 434.790 MHz
Channels	1
Channel Selection	Fixed
Technology	Hand-held Transmitter
Temperature Range	-10° C to + 40° C (13° F to + 104° F). Use Lithium for lower temperatures
Range	60m (200ft)
Aerial	Internal – printed on PCB
Transmitted power	1mW Typical

### POWER

Batteries	1x 9V Alkaline Manganese
Quiescent Current	15µA
Current Transmitting	20mA

### PROTECTION

IP Rating	54
Registration codes	Over 16 million

### INDICATOR

Type	1 x Red LED
Off	Transmitter is OFF and in standby mode
Slow flash	Transmitter is ON and ready for use (The SET Button has been pressed and released)
On	Transmitting (A STOP, SET or Function Button is being pressed)
Fast flash	Transmitting – Indication that the battery will need replacing soon

### COMPLIANCE

FCC	FCC CFR 47-part 15.231 433.9MHz
IC	ISED RSS-210 Issue 8 433.9MHz
RoHS	Directive 2011/65/EU